

Nano-Cyte™ LC

3D Image based stability for live cell imaging

Introduction

Nano-Cyte™LC* is an image based, platform independent stabilization system that changes the nature of live cell imaging. With Nano-Cyte™LC you no longer need to be concerned with temperature gradients, sample drift, and microscope drift. Unprecedented stability in the nanometer regime allows long term experiments as never before.

Nano-Cyte™LC is the complete image acquisition and stabilization instrument for live cell imaging. Factors such as system instability, environmental temperature drift and sample-to-microscope temperature gradients are no longer a factor with Nano-Cyte™LC. Our integrated approach to image stabilization yields image stability within ± 10 nanometers in X and Y, and ± 20 nanometers in Z. Nano-Cyte™LC has proven stability over days and is a unique offering that promises to revolutionize live cell imaging.

* Patent Pending

What is Nano-Cyte™LC?

Nano-Cyte™LC is an integrated suite of high precision piezo and motor driven motion control systems with automated, active stabilization software. The Nano-Cyte™LC has been designed to interface with external hardware components such as EMCCD cameras, light sources and shutters.

Hardware

The Nano-Cyte™LC is comprised of a high performance three axis nanopositioning system coupled with a two axis motorized micro-positioning stage. The nanopositioner is a flexure based piezoactuated design with integrated PicoQ® sensors for absolute position sensing and nanometer precision under closed loop control. The micropositioning stage enables the user to have a large range of travel for surveying samples prior to engaging the active stabilization. All motion devices are controlled by the Nano-Cyte™ controller. The controller is USB 2.0 enabled and can additionally control other user devices such as EMCCD cameras, lasers and shutters.

Software

The Nano-Cyte™LC software package simultaneously performs image acquisition and stabilization. The software works seamlessly with the provided hardware and the acquired images can be exported to ImageJ for post acquisition processing.


The image stabilization algorithms are inherent with the image acquisition system.

Advantages

- Intrinsic to experiment, directly stabilizes the detected image
- 3D stabilization at the nanometer scale
- Active stabilization over days
- Simultaneous image acquisition and stabilization
- Microscope platform independent
- Corrects for temperature gradients and drift
- Particle tracking capability
- Stability of ± 10 nm (XY), ± 20 nm (Z)
- Integrated hardware and software
- User friendly graphical interface
- Automated software control

Experiment Intrinsic Stabilization




Nano-Cyte™LC uses an "experiment intrinsic" method to achieve image stability. The diagram below shows the operation of Nano-Cyte™LC feedback control system. The stabilization is based on the imaging pathway.

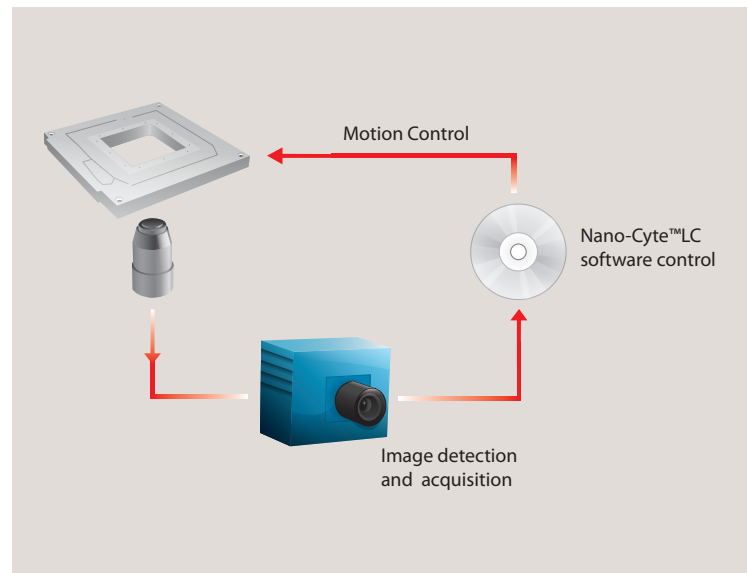

Join the Nano-Cyte™ revolution
www.madcitylabs.com

Nanometer Stability Over Days

Image stability data measured over 44 hours. The red line indicates the measured drift. The blue line indicates the stabilized position when using Nano-Cyte™LC.

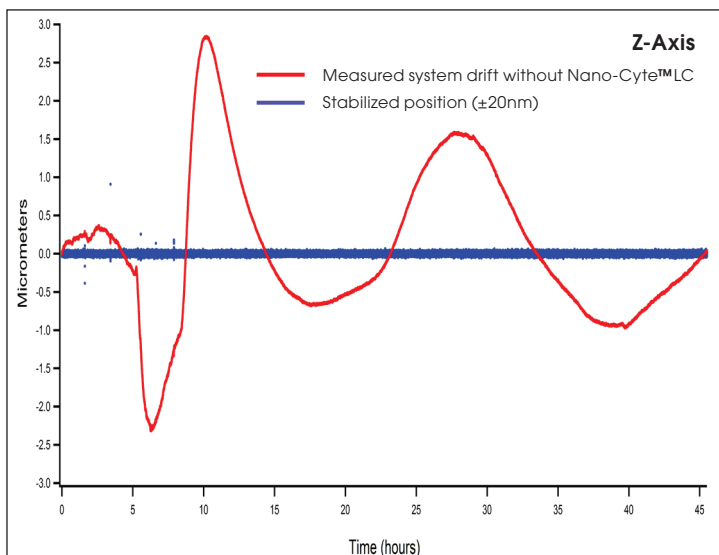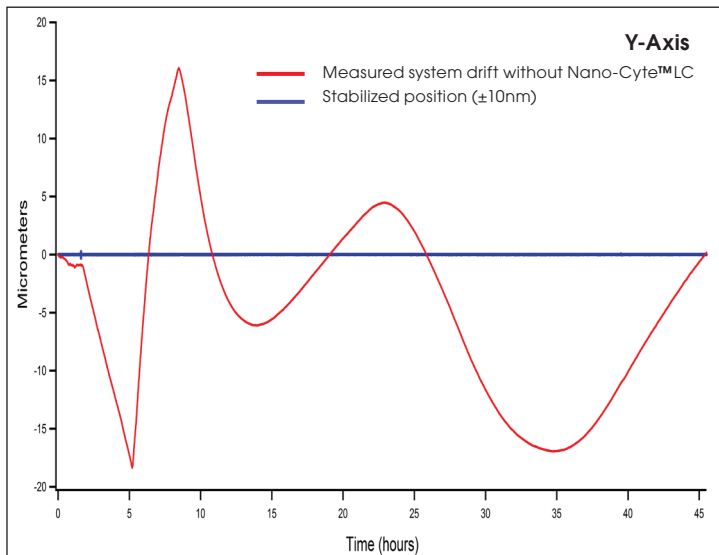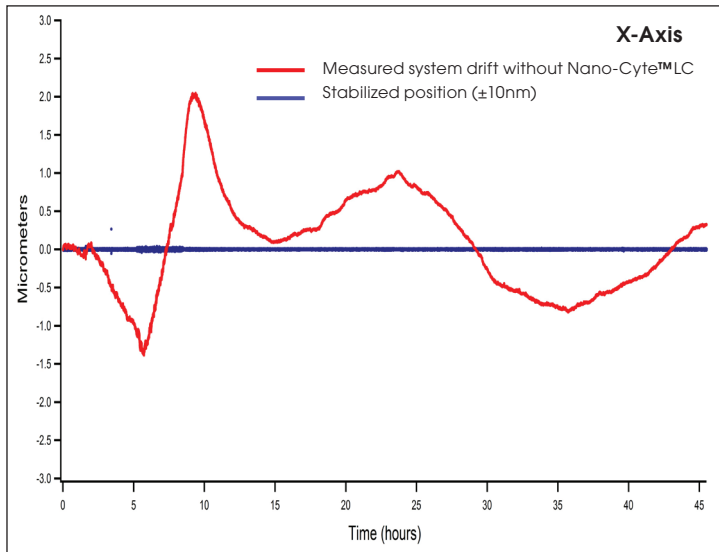

Nano-Cyte™ LC Specifications

| Stability | |
|--|-----------------------------|
| X-Axis | ± 10 nm |
| Y-Axis | ± 10 nm |
| Z-Axis | ± 25 nm |
| Tracking Speed/Drift Rate Compensation | 10 nm/sec |
| Dynamic Temperature Range | 18 °C - 37 °C |
| Hardware Specifications | |
| Nanopositioning Range of Motion | 200 μm × 200 μm × 200 μm |
| Resolution | 0.4 nm |
| Step Size | 3 nm |
| Micropositioning Range of Motion | 25 mm x 25 mm |
| Resolution | 20 nm |
| Step Size | 95 nm |
| Controller | Nano-Cyte™ |
| Interface | USB 16 bit DAC |
| TTL | 4 channels |
| Compatibility | |
| Microscope Compatibility | Nikon Ti, TE Series |
| | Zeiss Axio Series |
| | Olympus IX Series |
| Supported EMCCD Camera types | Andor |
| | Photometrics |
| | Hamamatsu |
| Maximum Frame Rate | 10 frames/sec |
| Power Supply | 90 - 260 VAC (50/60Hz) |
| Communication | USB |
| Operating System | Windows 2000/XP Pro/Vista/7 |

MCL
MAD CITY LABS INC.

+1 608 298-0855 sales@madcitylabs.com www.madcitylabs.com